



## Series 925

### MICROPIRANI™ TRANSDUCER

The HPS® Series 925 MicroPirani™ transducer is a thermal conductivity gauge based on a unique, MEMS-based (Micro-Electro-Mechanical Systems) sensor. The 925 is used for vacuum pressure measurement and offers analog voltage output, digital interface and set point relays for process controlling.

#### Features and Benefits

- Increased pressure measurement range from  $10^{-5}$  Torr to atmosphere, two decades beyond a standard Pirani
- Three set point relays for process control (option)
- Ultra compact design
- High accuracy for improved process control
- Ease of operation via analog output and digital communication (RS232 or RS485)
- MicroPirani™ solid state sensor is resistant to damage from air inrush or vibration
- Mountable in any orientation for ease of installation; no loss of measurement accuracy
- Optional display available for local pressure indication
- Alternate analog output and electrical connectors available to match other vendors' gauges and facilitate an easy upgrade
- CE marked, compliant with EMC Directive 2004/108/EEC

#### Applications

The 925 can be used in many different vacuum applications within the semiconductor analytical, and coating industries:

- General vacuum pressure measurement
- Foreline and roughing pressure measurement
- Gas backfilling measurement and control
- Mass spectrometer control
- Activation of UHV gauges
- System process control
- Control system pressure




## Description

The 925 Transducer offers a wide measurement range from  $1 \times 10^{-5}$  Torr to atmosphere that is based on measurement of thermal conductivity. The MicroPirani sensor consists of a silicon chip with a heated resistive element forming one surface of a cavity. A cover on top of the chip forms the other surface of the cavity. Due to the geometry of the sensor, convection cannot take place within the cavity and consequently, the sensor is insensitive to the mounting position. Gas molecules are passed by diffusion only to the heated element where the heat loss of the gas is measured.

Like all thermal conductivity sensors, the 925 is sensitive to gas type. To compensate for gas dependency, the MicroPirani sensor has a number of common gas calibrations that can be selected via the digital interface. This makes it a simple solution for locating medium to fine leaks in vacuum systems.

The 925 has RS232 or RS485 digital communication interface for setup of transducer parameters and to provide real time pressure measurement.


The 925 also has an analog pressure output of 1VDC/decade that can be interfaced to external analog equipment for pressure readout or controlling. Other analog outputs and curves can be selected via the digital user interface.

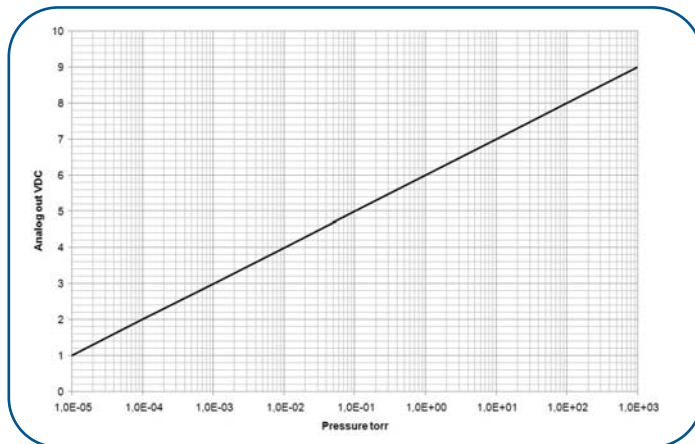

The 925 has up to three mechanical relays which can be used for process control, examples are interlocking valves or pumps.

The 925 compact design significantly reduces the amount of space occupied by a vacuum gauge. This is particularly appealing to system designers and allows for a more compact vacuum system.


## Dimensions: 925 (KF16)

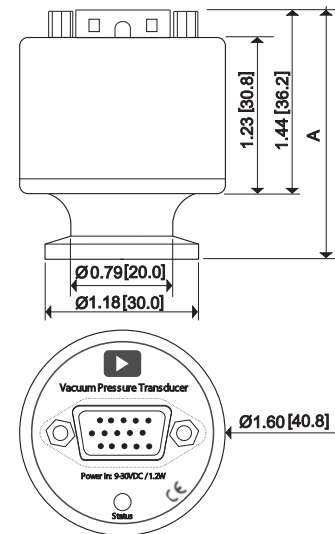

Flange	A
NW 16 KF	1.93 (49.1)
NW 25 KF	2.00 (50.9)
1/8" NPT-F	3.50 (89.0)
8 (1/2") VCR®-F 1	3.24 (82.4)
4 (1/4") VCR®-F 1	3.20 (81.4)
CF 1.33"	2.30 (58.5)
NW 16 KF ext	2.58 (65.6)

Dimensions: inch (mm)

## Pinout 925 (3 setpoints)

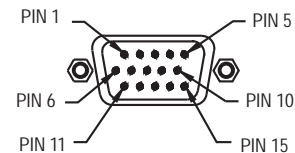

- |                                |   |
|--------------------------------|---|
| 1 - RS485 (-) / RS232 transmit | 9 - Relay #1 NC                               |
| 2 - RS485 (+) / RS232 receive  | 10 - Relay #2 NC                              |
| 3 - Power (+)                  | 11 - Relay #2 Common                          |
| 4 - Power (-)                  | 12 - Relay #2 NO                              |
| 5 - Analog Output (+)          | 13 - Relay #3 NC/Analog Output 2 + (Optional) |
| 6 - Analog Output (-)          | 14 - Relay #3 Common                          |
| 7 - Relay #1 NO                | 15 - Relay #3 NO                              |
| 8 - Relay #1 Common            |   |

# Specifications

<b>Sensor Type</b>	MicroPirani (MEMS Thermal Conductivity)
<b>Measuring Range</b>	1.0 X 10 <sup>-9</sup> Torr to Atmosphere
<b>Set Point Range</b>	5.0 X 10 <sup>-1</sup> Torr to 500 Torr
<b>Calibration Gas</b>	Air, Argon, Helium, Nitrogen, Hydrogen, H <sub>2</sub> O vapor, CO <sub>2</sub> , Xenon, Neon
<b>Operating Temperature Range</b>	0° to 40°C (32° to 104°F)
<b>Maximum Bakeout Temperature</b>	85°C (185°F), non-operating
<b>Communication</b>	RS485 / RS232 (4800 to 230400 Baud)
<b>Controls</b>	Zero adjust, atmosphere adjust, pressure units, baud rate, address, factory default, gas type; set point functions: value, hysteresis, direction, enable analog output transducer status, switch, LED test
<b>Status</b>	Pressure reading and units, set point, operating time, transducer temperature, user tag, model, device type, serial number, firmware and hardware versions part number, manufacturer
<b>Analog Output Analog Output Resolution</b>	1 to 9 VDC, 100Ω maximum output impedance, 1 volt/decade 16 bit
<b>Relays (Optional) Relay Contact Rating Relay Response</b>	925 - 3 relays SPDT 1 A @ 30VAC/DC, resistive <100 msec maximum
<b>Power Requirements</b>	9 to 30 VDC, < 1.5 watts max
<b>Accuracy (Typical)</b>	5 X 10 <sup>-4</sup> to 10 <sup>-3</sup> Torr ±10% of reading 10 <sup>-3</sup> to 100 Torr ±5% of reading 100 Torr to atm ±25% of reading
<b>Repeatability (Typical)</b>	10 <sup>-3</sup> to 100 Torr ± 2% of reading
<b>Overpressure Limit</b>	3000 Torr absolute
<b>Installation Orientation</b>	Any
<b>Internal Volume (KF16)</b>	2.80 cm <sup>3</sup>
<b>Materials Exposed to Vacuum</b>	304 stainless steel, Silicon, SiO <sub>2</sub> , Si <sub>3</sub> N <sub>4</sub> , Gold, Viton®, Low out gassing epoxy resin
<b>Electronic Casing and Flange</b>	304 stainless steel
<b>Weight (KF 16)</b>	170 g
<b>CE Certification</b>	EMC Directive 2004/108/EEC

Note: Accuracy and repeatability are typical values measured with Nitrogen gas at ambient temperature.



# Ordering Information

Transducer Model	Code
925 MicroPirani™	925-
<b>Flange</b>	
KF16	1
KF25	2
1/8" npt	3
VCR4	4
VCR8	5
CF1.33	6
KF16 extended	8
<b>Interface</b>	
RS232 / Analog	1
RS485 / Analog	2
<b>Analog Out</b>	
Standard MKS	0
MKS Moducell (limited measuring range)	8
<b>Connector Relays</b>	
SUBD 9pin male / 1 relay set point (925C compatible)	1
SUBD 15pinHD male / no relay	2
SUBD 15pinHD male / 3 relays	3
SUBD 15pinHD male / 3 relays / Dual Aout	5
<b>Enclosure Sealing</b>	
Standard / Viton sealing	0
Standard / UHV sealing	1
Standard / Viton sealing/display	4

**Ordering Code Example:** 925-11030 = KF16, RS232, standard MKS analog output, sub D 15 pin HD male connector, 3 set point relays, Viton seals

### Analog Output

The 925 has a standard analog output voltage pressure signal of 1VDC/decade, but it can also emulate analog voltage outputs from a variety of other vacuum transducers. The emulation feature can be used to upgrade and replace other vendors gauges in OEM applications without changing system software. Contact MKS customer service for details.

The standard 925 uses a 15 pin HD sub D connector, but it is also available with connectors offered by other vendors.

## 925 with Display



The optional display is user configurable; the user can change pressure units, orientation and has access to set point parameters as well as gas type. The display also indicates the status of the available set point relays.

## PDR900 Power Supply & Display



The PDR900 power supply and readout unit is a stand alone, single channel controller for use with the Series 900 digital vacuum transducers. It can be used as a stand-alone power supply readout unit or as a tool for configuration, calibration and diagnostics of system integrated transducers in OEM applications.



### MKS Global Headquarters

2 Tech Drive, Suite 201  
Andover, MA 01810  
Tel: (978) 645.5500  
Tel: (800) 227.8766 (in USA)  
Web: www.mksinst.com  
Email: mks@mksinst.com

### MKS Vacuum Technology

HPS® Products  
5330 Sterling Drive  
Boulder, CO 80301  
Tel: (303) 449.9861  
Tel: (800) 345.1967 (in USA)

### MKS Denmark ApS

Ndr. Strandvej 119G  
DK-3150 Hellebaek  
Denmark  
Tel: +45 4492 9299  
Email: mksdenmark@mksinst.com